

Interleaver



Interleaver

Mass Production Ready !

25/50G, 50/100G, 100/200G Available
Based on Etalon Technology
Low Insertion Loss, Low CD

25/50G, 50/100G, 100/200G 提供可能
エタロン技術に基づく
低挿入損失、低CD



Wavelength Locker




Wavelength Locker

Mass Production Ready !

12.5G, 25G, 50G is available
High Precision Locking Accuracy
High Stability Over Temperature

12.5G, 25G, 50Gが可能
高ロックオン精度
全温度範囲で安定性が高い

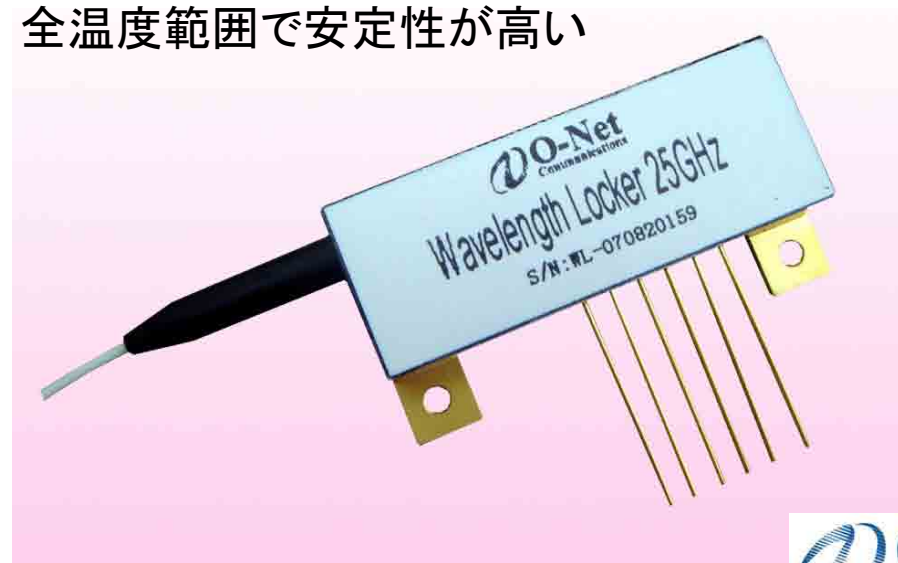

Optical Amplifier



Variable Gain Amplifier

MSA Size available

MSA サイズ

Typical minimum output power :17dBm

Typical gain :13~30dB

Build-in control electronics

標準最小出力: 17dBm

標準利得: 13~30dB

電気制御装置付き



Optical Amplifier



Mini Amplifier

Designed For 40–100Gb/s Networks

40–100Gb/s ネットワーク用

Low Power Consumption
Build-in Control Electronics

低消費電力
電気制御装置付き





PM Products

PM Products

Mass Production Ready !

Low insertion loss

High extinction ratio

Polarization Maintaining Pigtail (PM pigtail)

Polarization Maintaining Tap coupler (PMTTC)

Polarization Beam Combiner/Splitter (PBC/S)

Isolated Polarization Beam Combiner With Depolarizer (IPBCD)



WDM



DWDM

Customized Filters For NGN

In-House coating capabilities
Integration Solution with Firmware & Electronics
High Volume Manufacturing
Fast Lead Time

NGN用のカスタマイズ フィルタ

In-House コーティング 能力
ファームウェア& 電気 総合ソリューション
高量産
短納期

CWDM

Mini Size available

In-House Coating capabilities
Low Insertion Loss
High Volume Manufacturing

ミニ サイズ

In-House コーティング 能力
低挿入損失
高量産



Isolator

Free Space Isolator

No.1 Isolator Manufacturer In The World

世界 ナンバー1 アイソレータ メーカー

RoHS Compliant

Receptacle or Pigtail Type

SMT Type

RoHS 準拠

リセプタクルとピグテールタイプ対応可

SMT タイプ

